

12

**EUROPEAN PATENT APPLICATION**

21 Application number: 90200080.1

22 Date of filing: 12.01.90

51 Int. Cl.<sup>5</sup>: **C09D 175/04, C08G 18/08,**  
**C08G 18/75, C08G 18/78,**  
**C08G 18/65, C08G 18/16,**  
**/(C08G18/08,101:00)**

30 Priority: 20.01.89 BE 8900067

43 Date of publication of application:  
25.07.90 Bulletin 90/30

64 Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IT LI LU NL SE**

71 Applicant: **RECTICEL**  
**De Broquevillelaan 12**  
**B-1200 Woluwe-Saint-Pierre(BE)**

72 Inventor: Jourquin, Lucien  
**Cooppallaan 156-1**  
**B-9200 Wetteren(BE)**  
Inventor: Du Prez, Eddie  
**Molenberg 28**  
**B-9660 Brakel(BE)**

74 Representative: Callewaert, Jean et al  
**Bureau Gevers S.A. rue de Livourne 7 bte 1**  
**B-1050 Bruxelles(BE)**

54 **A method for preparing and applying a sprayable, light stable polyurethane.**

57 A method for preparing a light stable polyurethane, sprayable by means of a spray pistol, wherein use is made of an active hydrogen containing compound, wherein the functional groups consist for at least 50 % of an active CH<sub>2</sub>OH, NH and/or NH<sub>2</sub> group, the functionality of which varies from 2 to 8 and the equivalent weight of which is comprised between 100 and 3500, together with 2 to 300 parts, per 100 parts of said compound, of a chain extender and/or a cross-linker, the functional groups of which are OH groups, at least 50 % of which are primary OH groups, the equivalent weight of which is less than 100 and the functionality of which varies from 2 to 6, and with a catalytic system which comprises at least an organic lead, bismuth and/or tin (IV) compound and at least an amine initiator, having a functionality of 2 to 6, an equivalent weight lower than or equal to 200, and at least one aliphatic NH<sub>2</sub> or NH group.

**EP 0 379 246 A2**

# A method for preparing and applying a sprayable, light stable polyurethane

A method for preparing a light stable polyurethane, sprayable by means of a spray pistol and having an initial viscosity of 200 to 1200 cps at application temperature, a fibre forming time ("FT") larger than 4 seconds and a demoulding time ("DT") less than 10 minutes, wherein an isocyanate, having at least two NCO groups which are not directly attached to an aromatic group, is made to react with a compound containing active hydrogen with respect to NCO groups, in the presence of a chain extender and/or a cross-linker and possibly a blowing agent.

It is important to notice that chain extenders and cross-linkers form compounds containing also active hydrogen with respect to NCO groups, the equivalent weight (EW) of which is however relatively low.

The main object of the invention is to propose a method which allows to obtain a light stable polyurethane, which is very appropriate for spraying, by means of which a sufficiently thick and homogeneous polyurethane layer can be applied to a surface of an open mould in one single passage or spray process, which is relatively viscous and gels quickly in order to prevent the run off of the material on the mould surface under the influence of the gravity force and the viscosity of which is still sufficiently low in the initial state in order to obtain a homogeneous spreading over the mould surface, and also to prevent clogging of the spray pistol. More particularly, it is important that a too quick gelation does not occur during the spraying so that a homogeneous thickness would be obtained by a sufficient flow of the reactive mixture in the initial reaction stage, somewhat in an analogous manner as it is the case with a paint. Further, the initial viscosity increase may not be too large a.o. in order to prevent deposits on the spray nozzle outlet, which would change the spray pattern. Finally, in order to guarantee a sufficient productivity as to production cycle time, the gelation ("curing") of the reacting mixture and hence the demoulding time has to be as short as possible.

To this end, use is made in the method according to the invention of an active hydrogen containing compound, wherein the functional groups consist for at least 50 % of an active  $\text{CH}_2\text{OH}$ ,  $\text{NH}$  and/or  $\text{NH}_2$  group, the functionality of which varies from 2 to 8 and the equivalent weight of which is comprised between 100 and 3500, together with 2 to 300 parts per 100 parts of said compound of a chain extender and/or a cross-linker, the functional groups of which are OH groups, at least 50 % of which are primary OH groups, the equivalent weight of which is less than 100 and the functionality of which varies from 2 to 6, and with a catalytic system which comprise at least an organic lead, bismuth and/or tin (IV) compound and at least an amine initiator, having a functionality of 2 to 6, an equivalent weight lower than or equal to 200, and at least one aliphatic  $\text{NH}_2$  or  $\text{NH}$  group.

In a particular embodiment of the invention, use is made of a catalytic system comprising at least an amine initiator together with a lead, tin or bismuth compound and (a) a zeolite type catalyst formed of an alkaline aluminium silicate with sodium and/or potassium ions, and/or (b) an alkaline catalyst having a pH higher than 10 and consisting of diazobicyclo-alkenes or salts of the latter with weak organic acids or consisting of potassium, sodium or lithium salt of weak organic acids.

The invention relates also to a method for spraying the light stable polyurethane foam prepared according to the above described method.

This method is characterized by the fact that use is made of a two components system, wherein one component comprises the isocyanate and all of the additives which are stable with respect to this isocyanate during a sufficient time period and also compatible with the latter and wherein the other component comprises the compounds containing active hydrogen with respect to NCO groups, especially polyols, chain extenders and cross-linkers and additives which are stable with respect to these compounds during a sufficient time period and also compatible with the latter.

Other particularities and advantages of the invention will become apparent from the following description of a series of polyurethane formulations which are obtained by applying the method according to the invention and also of some specific embodiments of the method according to which the thus prepared polyurethane is sprayed.

Generally, the invention relates to a multiple component polyurethane system which can be sprayed on an open mould or on other surfaces by means of a multicomponent spray nozzle in order to form inherent light stable, flexible, semi-flexible, or rigid, microcellular or not cellular films or layers having a density of 500 to 1200  $\text{kg/m}^3$ .

These multicomponents comprise the following substances :

- a) an isocyanate, the NCO groups of which are not directly attached to an aromatic group, such as aliphatic or alicyclic polyisocyanates or derivatives of these ;
- b) with respect to the NCO groups active hydrogen containing compounds, especially so-called

"basic polyols" containing with respect to NCO groups reactive groups which consist mainly of  $\text{CH}_2\text{OH}$  and/or  $\text{NH}$  and/or  $\text{NH}_2$  or mixtures thereof, having a functionality between 2 and 8 and an equivalent weight between 100 and 3500 (within the context of this description, there is arbitrarily meant by "basic polyols" all of the here defined compounds) ;

5 c) 2 to 300 parts per 100 parts of the "basic polyols", of a chain extender and/or a cross-linker, dependent upon the hardness degree of the foils, having only functional OH groups, at least 50 % of which are primary OH groups, the equivalent weight of which is lower than 100 and the functionality of which varies from 2 to 6 ;

d) a synergic catalytic system comprising at least one compound of each of the next two series :

10 1. an organic lead, bismuth or tin compound or mixtures thereof ;

2. one or more amine containing initiators, (functionality  $\geq 2$ ), which in fact also serve as chain extender and/or as cross-linker and which are either or not combined with an alkaline catalyst or zeolite type catalyst, as will be defined further hereinafter ;

e) 0 to 0.4 % water, present in the active hydrogen containing compounds;

15 f) possibly low boiling liquids serving as a physical blowing agent and the amount of which is comprised between 0 and 0.04 moles with respect to 100 gr of the active hydrogen containing compounds (b) and (c), the boiling point of these liquids being preferably comprised between 20 and 70 °C.

The cross-linkers have a functionality higher than 2, whilst the chain extenders have a functionality of 2. In both cases, the molecular weight is relatively low.

20 The suitable isocyanates can be very different.

According to a first embodiment of the invention, use can thus be made of an isocyanate consisting mainly of IPDI monomer and/or mixtures of IPDI monomer with IPDI derivatives, such as trimers, more particularly isocyanurates or biuret, prepolymers and/or carbodiimide/urethidion derivatives and this in such proportions that a NCO value of 15 to 37.8 in percent by weight is obtained.

25 In a second embodiment, the isocyanate consists of TMXDI or derivatives (except from isocyanurate trimer) : prepolymers, biuret trimer and/or carbodiimide/urethidion derivatives, in such proportions that a NCO value of 15 to 34.4 in percent by weight is obtained.

In a third embodiment, the isocyanate is formed of HDI whether or not in combination with derivatives, such as trimers, prepolymers and/or carbodiimide/urethidion derivatives, as in the first embodiment, taking 30 care that the NCO value is anyway finally situated between 15 to 50.

In a fourth embodiment, the isocyanate is formed of H6XDI and possibly of analogous combinations as is the case in the first hereabove described embodiment in which the NCO value is comprised between 15 and 43.

35 A fifth embodiment consists in using H12MDI, possibly in combination with derivatives or consisting of prepolymers and/or carbodiimide/urethidion derivatives, the NCO value being comprised between 15 and 31.8.

Generally, also other aliphatic or alicyclic isocyanates or derivatives thereof can be used provided that the following conditions are simultaneously met :

1) functionality of basic monomer = 2

40 2) NCO groups not directly attached to aromatic ring.

The types or mixtures defined in the following Table 1 are preferred.

45

50

55

TABLE 1

	Prepolymer (*) (+ monomer)	Isocyanurate (+ monomer)	Biuret (+ monomer)	% NCO preference (of final mixture)
IPDI	X	X	X	20-30
TMXDI	X	-	X	15-30
HDI	X	X	X	20-35
H6XDI	X	X	X	20-35
H12MDI	X	X	X	15-25

(\*) Preferably but not exclusively, following reactive components (versus NCO) are used for the prepolymerisation of the here described polyisocyanates :

1) Polyetherpolyols, chain extenders/cross-linkers with only sec. and/or primary OH groups as reactive groups and :

Hydroxylnumber : 15 - 1800

functionality : 2 - 6 (= number of OH groups per molecule).

2) Polyamines (with primary and/or secondary amino groups) with "sufficient" low reactivity versus NCO groups, in order to allow the preparation of stable, homogeneous prepolymer mixtures in the given % NCO range.

A sufficient low (= moderated) reactivity of the polyamines is obtained for polyamine molecules with :

- a sufficient high equivalent weight (= MW/f) or in other words a sufficient high molecular weight (MW) and a sufficient low functionality (f), i.e. for example a functionality of 2 or 3.


The minimum molecular weight, depending on other molecule parameters, will be described further.

- and/or sufficient steric hindrance of the sec. NH groups, through substitution with non reactive groups, such as (1) linear alkyl groups (C<sub>2</sub>-C<sub>10</sub>) substituted by electronegative groups, such as phenyl, cyano, halo en,... and (2) branched alkyl groups (C<sub>4</sub>-C<sub>10</sub>).

A more specific description of such preferred polyamines, which can be subdivided in two general chemical classes, is given hereafter :

a) Polyoxypropylene di- and triamines

(e.g. JEFFAMINE® types, produced by TEXACO)



- funct. : 2

- MW : 400-6000 (equiv.weight: 200-3000)


a.2. id. a.1 but sec. NH-R end groups instead of (more reactive) primary NH<sub>2</sub> group.

- funct. : 2

- MW : 150-6000 (equiv.weight: 75-3000)

- R is e.g. cyanoethyl or isohexyl group.

a.3.

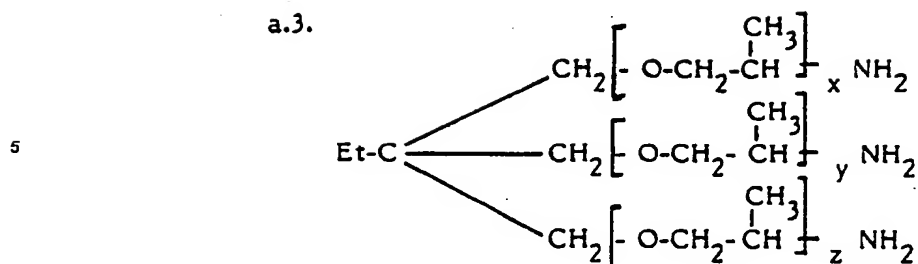

- funct. : 3

- MW : 900-9000 (equiv. weight : 300-3000)






a.4 id. a.3. but sec. NH-R end groups instead of primary NH<sub>2</sub> groups.

- funct. : 3

- MW : 300-9000 (equiv. weight : 100-3000)

b) Branched alkyl (C<sub>4</sub>-C<sub>10</sub>) substituted di- or tri-secondary polyamines in MW range of 170-1000

Hereafter some typical (but not limitative) examples :

- R<sub>1</sub> group in examples b1-b3 is isohexyl- R<sub>1</sub> group in examples b4-b5 is

- R'' group in example b6 is tert. butyl.

It should be remarked that all the above described polyamines can also be directly added in the formulation (through blending into the polyolcompound) i.e. "one-shot" method, instead of through prepolymerisation with the polyisocyanate in a separate step. In case of an equivalent weight  $\leq 200$ , such molecules, when added by the "one-shot" method, also function as "amine- initiators" (see further), i.e. as a combination of co-catalyst and extender/cross-linker. In case of a functionality of 2, such polyamines will also increase mechanical strength properties, such as elongation and tear resistance.

The NCO index of these different isocyanates comprised in Table 1, representing the stoichiometric ratio between the NCO groups and the active hydrogen containing components, is generally comprised between 80 and 130 and preferably between 85 and 110.

The active hydrogen containing compounds, which are particularly appropriate to react with the

isocyanate in order to form polyurethane, preferably consist of "basic polyols" and especially polyoxal-  
kylene compounds (polyetherpolyols), which are thus formed by polyaddition of propylene oxide and/or  
ethylene oxide on low molecular starters with OH, NH and/or NH<sub>2</sub> groups, which have a functionality of 2 to  
8.

These compounds present specifically terminal groups consisting of OH groups, at least 50 % of which  
are primary OH groups, of secondary NH groups and/or of primary NH<sub>2</sub> groups.

Table 2 is grouping the polyetherpolyols which are most suitable for applying the invention.

TABLE 2

TYPE	OH (*)	sec NH and/or prim. NH <sub>2</sub>	preferred funct.	preferred equiv.weight = $\frac{MW}{\text{funct.}}$	preferred starters
1	X	-	2-6	100-2500	polyalcohols with f 2-6 and IOH > 800 (***)
2 (**)	(X)	X	2-3	100-2000	

(\*) : 50 % prim. OH (preferably > 70 % prim. OH)

(\*\*) : Type 2 also known as "JEFFAMINES" (Texaco)

(\*\*\*) : hydroxyl number

(X) : possibly present.

Other types of active hydrogen containing compounds are the polyesterpolyols forming ester condensa-  
tion products of dicarboxylic acids with low molecular polyalcohols having a functionality of 2 to 4,  
preference being given to polyesterpolyols having a terminal hydroxyl number of 30 to 200 (100 % primary  
OH groups) and a functionality of 2 to 3.

Another group of appropriate compounds active hydrogen containing groups are the polycaprolactone  
esters with terminal primary OH groups and preferably the ones with a hydroxyl number of 30 to 400 and a  
functionality of 2 to 4.

A further very suitable compound with active hydrogen containing groups are the polytetramethylene  
ether glycols (PTMG), which are polytetrahydrofuran with 100 % primary OH groups, a functionality of 2  
and a hydroxyl number of 35 to 200.

Finally, this active hydrogen containing compound can consist of polyols with a functionality of 2 to 3  
and a hydroxyl number of 25 to 200, which are further modified with polymerized organic fillers, such as  
polyols grafted with styrene/acrylonitrile, "PHD" polyols and "PIPA" polyols, the filler content varying  
between 3 and 50 % by weight (see Belgian Patent Application No. 08701053). The polyols of this type  
which are preferred are the ones having a hydroxyl number of 25 to 35, a functionality of 2 to 3 and a filler  
content of 5 to 20 %.

The used chain extenders and/or cross-linkers can be considered as a special group of the active  
hydrogen containing compounds and contain only functional OH groups. Moreover, these ones have an  
equivalent weight of about 30 à 300 and preferably lower than 100. Table 3, given hereafter, shows the  
concentration of the chain extenders and/or cross-linkers in function of the equivalent weight of the used  
polyol as active hydrogen containing compound, which allows to obtain optimal results. In this table, the  
amounts are expressed in parts by weight per 100 parts "basic polyol" (b).

TABLE 3

Equivalent weight	Conc. (parts by weight)	
	generally	preferably
< 500	2 - 30	4 - 25
> 500	2 - 300	4 - 150

Typical preferred compounds of cross-linkers and chain extenders with only active OH groups having a functionality of 2 to 4, a hydroxyl number higher than 250 and a primary OH group concentration higher than 50 % are the next ones : ethylene glycol, propanediol, butanediol, pentanediol, hexanediol, glycerin, trimethylpropane, triethanolamine, trimethylolethane, pentaerythrol, bisphenol A and cyclohexanedimethanol, and also possible addition products of all these examples with less than or equal to 5 moles ethylene oxide and/or propylene oxide per mole chain extender/cross-linker.


The nature of the above mentioned catalysts is further illustrated and described hereafter.

#### (1) "Pb cat"

These are lead compounds which are already known per se as catalysts for preparing polyurethane with an integral skin. Such catalysts have been described among others in the Dutch Patent Application No. 77,02676.

Thus, usually a compound from one of the following groups is used as organolead compound :

- organolead (II) salts of carboxylic acids, containing at least one carboxylic group,
- lead dithiocarbamates having formula :

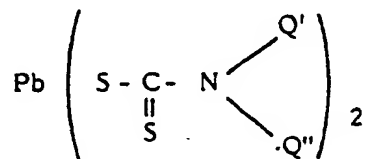


wherein Q' and Q'' are different or the same and represent an alkyl group with 1 - 20 carbon atoms,

- organolead (IV) compounds having the formula  $\text{PbQ}_4$ , wherein Q represents an alkyl group with 1 - 6 carbon atoms, and
- lead (II) acetylacetonate.

More particularly, there has been determined that amongst these organolead compounds, the following compounds are very suitable :

- organolead (II) salts of carboxylic acids such as lead acetate, adipate, citrate, 2-ethylhexoate, laurate, linoleate, naphthenate, octanoate, oleate, oxalate, palmitate, resinate, ricinoleate, salicylate, stearate, tallate and tartrate,
- a dithiocarbamate having the formula:

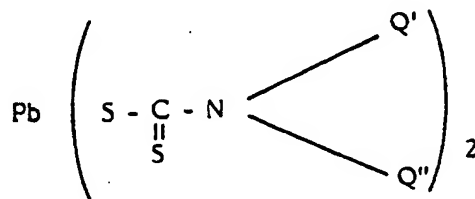

wherein Q' and Q'' represent methyl, ethyl, butyl or amyl, and

c) the compounds having the formula  $PbQ_4$ , wherein  $Q$  represents methyl or ethyl.

The Pb(II) carboxylates, being lead salts of organic monocarboxylic acids, are particularly preferred.

A typical carboxylic acid is a whether or not branched aliphatic monocarboxylic acid with formula  $R-COOH$ , wherein R is an alkyl having 7 to 12 carbon atoms, such as lead-2-ethylhexoate. Another carboxylic acid is naphthenic acid which forms lead naphthenate.

## (2) "Bi cat"


Use is made of organic bismuth compounds which are known per se for preparing polyurethane with integral skin, described a.o. in Dutch Patent Application No. 80,01362.

Preference is especially given to three-valency bismuth compounds belonging to the same category as the above described organolead compounds, such as Bi-2-ethylhexoate and Bi-naphthenate.

## (3) "Sn cat"

### a. Sn(IV) carboxylates

These compounds correspond to following general formula :




wherein  $R_1$  is a ( $C_1-C_4$ ) alkyl radical and  $R_2$  forms a ( $C_1-C_{12}$ ) alkyl radical or a naphthenic acid radical, the alkyl radicals being linear or branched.

Preference being given to compounds wherein  $R_1$  is a methyl group and  $R_2$  a ( $C_7-C_{11}$ ) alkyl radical or a naphthenic acid radical, or also wherein  $R_1$  is a butyl group and  $R_2$  is a ( $C_1-C_4$ ) alkyl radical.

### b. Dialkyldistannoxane dicarboxylates

Those compounds have following general formula :

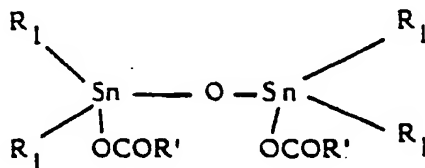


wherein  $R_1$  is a ( $C_1-C_4$ ) alkyl radical and  $R'$  a ( $C_1-C_{12}$ ) whether or not branched alkyl radical.

### c. Alkyltinhalides

These compounds have the following general formula :





wherein  $R_1$  is a  $(C_1-C_4)$  alkyl radical, "Hal" is a halogene, preferably chlorine or bromine,  $x + y = 4$  and  $x$  or  $y$  varies from 1 to 3.

5

#### (4) "Alkaline cat"

These compounds are strong, alkaline catalysts having a pH larger than 10 and belonging to one or more of the following classes :

10 a) diazobicyclo-alkenes and salts of these with weak organic acids ( $pK_a > 4$ ), having general formula :



A typical preference is given to 1,8-diazobicyclo-(5,4,0)-undecene-7 as well as to the octoate or phenolate salt of this compound.

b) K, Na or Li salts of weak organic acids ( $pK_a > 4$ ).

25 A typical preference is given to the octoate, phenolate and oleate salts of K or Na.

#### (5) "Amine initiators"

30 Such initiators which are known per se and which can be used in the method according to this invention, are described a.o. in Dutch Patent Applications 77,02676 and 80,01362, provided that a minimum functionality of 2 is required.

Aliphatic or alicyclic alkanolamines or polyamines, having amino group not directly attached to an aromatic ring are generally considered in this respect.

35 The number of NH and/or  $NH_2$  groups is at least 2, if no OH groups are present and, at least 1 if OH groups are present.

The total number of reactive groups, formed by NH,  $NH_2$  or OH, mostly varies between 2 and 5.

Typical preferred compounds, notably aliphatic compounds having a functionality of 2 to 4, are the following ones : monoethanolamine, diethanolamine, diisopropanolamine, ethylenediamine, isophoronediamine, N,N'-dimethyl(diethyl)-ethylenediamine,

40 2-amino-2-methyl (or ethyl) -1-propanol,

2-amino-1-butanol,

3-amino-1,2-propanediol,

2-amino-2-methyl (ethyl)-1,3-propanediol.

45 "Jeffamines" (Texaco) (propylene oxide addition products having mainly terminal primary  $NH_2$  or secondary NH groups - functionality 2 à 3). Addition products of propylene oxide and/or ethylene oxide on ethylenediamine initiator (2 à 8 moles/mole ethylenediamine).

50 As mentioned already above the sufficient low reactive polyamines, suitable for the prepolymerization of the polyisocyanates, function also as amine initiators provided their molecular weight is less than 200 and that they are added by "one shot" method, i.e. that they are blended into the polyol compound.

#### (6) "Zeolite type cat"

55

These catalysts are alkaline aluminium silicates with Na and/or K ions, wherein the diameter of the micro-cavities is preferably comprised between 2 and 10 Angström and typically between 3 and 4 Angstrom and which show the following general formula :

$(M_2O)_a - (Al_2O_3)_b - (SiO_2)_c - (H_2O)_d$ , wherein M represents potassium and/or sodium, beside sodium and/or

potassium, also calcium ions can possibly be present.

These silicates can be mixed, as fine powders or as pastes, in liquid dispersion media with the other reaction products for forming polyurethane.

It is important to notice that these zeolites have thereupon an extra possible function, notably the in situ dehydration of the active hydrogen containing compounds, mostly thus the polyols compounds, for example if a maximum density of the obtained polyurethane film, without cellular structure, is desired.

Very suitable catalytic systems, which are applicable according to the invention and which specifically promote the reactions of aliphatic and alicyclic NCO groups with active hydrogen containing compounds, such as OH, NH and NH<sub>2</sub> groups, are shown in the following Table 4.

TABLE 4

Combin. ref.	"Pbcat" (1)	"Bi cat" (2)	"amine initiator" (5)	"Sn cat" (3)	"Zeolite type cat" (6)	"Alkaline cat" (4)
C1	X	-	X	-	-	-
C2	X	-	X	X	-	-
C3	X	-	X	-	X	-
C4	X	-	X	-	-	X
C5-C8	X	-	X	(X)	(X)	(X)
C9	-	X	X	-	-	-
C10	-	X	X	X	-	-
C11	-	X	X	-	X	-
C12	-	X	X	-	-	X
C13-C16	-	X	X	(X)	(X)	(X)
C17	-	-	X	X	X	-
C18	-	-	X	X	-	X
C19	-	-	X	X	X	X
(x) indicates that at least two of the three catalysts are present. [types (3), (4) and (6)].						

An explicate preference is given to the following catalytic combinations : C4, C5, C6, C7, C8, C11, C12, C13, C14, C15, C16 and C18.

Recommended concentration ranges of these catalysts are as follows :

- Pb catalyst : 0 à 2 % and preferably less than 0.5 % for reducing or avoiding a metallic lustre and a H<sub>2</sub>S effect (darkening by contact with H<sub>2</sub>S as a result of PbS formation) ;
- Bi catalyst : 0 to 2 % and preferably less than 1.5 % for the technologic processability and heat stability of the final products ;
- Sn catalyst : 0 to 4 % and preferably less than or equal to 2 ;
- "Alkaline catalyst" : 0 to 2, and preferably less than 1, a.o. for the technologic processability and physical properties of the final products, more in particular the mechanical strength ;
- "Zeolite type catalyst" : 0 à 5 and preferably 0 à 3 ;
- "Amine initiators" : 1 to 30 and preferably 2 to 10.

It should be noted that the overall concentration of catalysts and amine initiators is dependent on the catalyst combination type, the nature of the used isocyanates and active hydrogen containing compound, the reactive mixture temperature, the mould temperature, etc... For a well defined situation, this concentration is however usually higher than for a "RIM" (reaction injection moulding) or "casting" technique, and this in order to guarantee an optimal curing and a limited flow or run off of sprayed thin reaction mixture films.

The possibly used blowing agent may be as well of chemical as of physical nature.

For use as a chemical blowing agent, preference is given to an amount of water between 0 and 0.4 % by weight with respect to the total used raw material amount, except for the polyisocyanates, i.e. with respect to said active hydrogen containing compound, cross-linker, chain extender and initiator, an amount lower than 0.1 % by weight being preferred.

The amount of used physical blowing agent having a boiling point of 20 à 70° C, is generally comprised

between 0 and 0.4 moles with respect to 100 grams of the total amount of active hydrogen containing compound, preference being given to the total omission of a physical blowing agent. The most typical compounds are trichlorofluoromethane and methylene chloride. These physical blowing agents are preferably added to the isocyanate containing component.

5 In order to guarantee the colour stability of the sprayed polyurethane, the reaction mixture comprises preferably antioxidants and UV absorbers, the following synergic combination being preferred :

a) primary, substituted phenol antioxidants at a concentration which is usually comprised between 0.1 and 1 % by weight with respect to the total polyurethane polymer amount ;

b) substituted ("hindered") alicyclic amines ("HALS") at a concentration which is generally comprised  
10 between 0.1 and 1 % by weight of the total polyurethane polymer amount ;

c) secondary antioxidants (peroxide decomposition products) consisting of organic phosphites or thioesters at a concentration which is usually comprised between 0 and 5 % by weight of the total polyurethane polymer amount ;

d) UV absorbers being preferably of the benzotriazole type, generally at a concentration between 0.1  
15 and 1 % by weight of the total polyurethane polymer amount.

For colour pigments, use is preferably made of light stable, anorganic and/or organic, solid pigments which are added in the shape of a dispersion in a liquid medium, such as in polyol.

The solid pigment concentration is usually comprised between 1 and 10 % by weight with respect to the total polyurethane polymer amount and preferably between 2 and 5 % by weight.

20 In most cases, it is preferred to add an internal release agent to the reaction mixture, preference being given to the polydimethylsiloxane-polyether copolymer types at a concentration lower than 20 % by weight polyether with respect to the total molecule and lower than 50 % by weight ethylene oxide with respect to the total ethylene oxide and propylene oxide amount in the polyether chain. Such internal release agents do not only facilitate the demolding of the polyurethane films but mostly also reduce the amounts of gas  
25 micropores in the film outer surface.

Generally, the release agent concentration comprises between 0 and 3 % by weight with respect to the total polyurethane polymer amount, and preferably between 0.5 and 2 % by weight.

Another substance which is usually added to the reaction mixture is a neutral, physical, tixotropic thickening agent consisting preferably of fumed, coagulated silicon dioxide, the concentration of which is  
30 generally comprised between 0 and 3 % by weight of the total polyurethane polymer amount ; and preferably between 0.5 and 2 % by weight.

For spraying the light stable polyurethane foam with the hereabove described formulation, use is preferably made of a two-components system, wherein one component comprises the isocyanate and all of the additives which are with respect to this isocyanate during a sufficient time period stable and compatible  
35 with the latter and wherein the other component comprises the with respect to NCO groups active hydrogen containing component, more in particular polyols and the chain extenders, cross-linkers and initiators, and additives which are with respect to these different compounds during a sufficient time period stable and compatible with the latter .

The first mentioned component comprises thus, in addition to the isocyanate, for example certain  
40 antioxidants, UV absorbers, catalysts, internal release agents, plasticizers, fire retardants, physical blowing agents, fillers, tixotropic thickening agents and the like. The second component comprises preferably, in addition to the active hydrogen containing compound, such as polyol, chain extenders and/or cross-linkers, water, pigments and certain catalysts, anti-oxidants, UV absorbers, water, release agents, plasticizers, fire retardants, fillers, tixotropic thickening agents, etc.

45 These components are preferably preheated, before the spraying, upto a temperature not higher than 120° and usually between 30 and 70° C, and this in order to speed up the reactivity of the reaction mixture which is sprayed on the mould surface.

The viscosity of the reaction mixture which is sprayed on a mould surface is a very important parameter.

50 According to the invention, there is aimed at a temperature adjustment of the reaction mixture at spraying in such a way that the viscosity is not higher than 1200 cps and preferably not higher than 700 cps, this in order to obtain an as homogeneous as possible flow of the reaction mixture, and not lower than 200 cps preferably not lower than 500 cps in order to avoid run-off.

For the spraying of the reaction mixture, use is preferably made of a spray pistol working with or  
55 without air.

Mostly, use is made of the so-called airless two-components system without solvent.

The mould surface, the reaction mixture has to be sprayed against for the formation of a polyurethane film, can have very various geometric shapes. The different places of this surface do actually have to be

within reach of the movable spray nozzle.

Further, this surface can be of any structure and nature and can be made of metal, plastic, rubber, leather, wood, whether or not provided with a film of an external release agent as generally used in the polyurethane casting and moulding methods.

- 5 In order to facilitate the curing of the reaction mixture at the moment it is sprayed on the mould surface, the latter is preferably heated up to a temperature between 30 and 100° and more specifically between 50 and 80° C.

The composition of the reaction mixture and the spray conditions, are preferably selected in such a manner that the films or layers, formed by spraying the reaction mixture on the mould surface, can be removed from the latter within less than 10 minutes after the spraying and preferably even within less than 3 minutes, and no excessive run-off of the reaction mixture occurs on this surface.

The most typical way for making finished pieces by applying the method according to the invention consists in that in a separate step and in a separate mould, a so-called back-foaming is done with a cellular, flexible to semi-rigid classic polyurethane foam, such as it is customary for the back-foaming of plastic foils.

- 15 In a very specific embodiment of the invention, a conventional polyurethane foam (MDI or TDI basis) with a typical mould foamed density of 50 to 600 kg/m<sup>3</sup> and a typical free rise density of 30 à 200 kg/m<sup>3</sup> is injected, after the spraying of a polyurethane film on a substantially hollow mould surface and before demoulding the latter, by means of a separate injection in the same mould cavity.

Preferably, there is sought to obtain in one single passage of the spray nozzle, a film thickness between 0.3 and 3 mm, thicker layers being however obtainable by spraying a number of different reaction mixture layers upon each other by successive spray nozzle passages.

The density of the obtained polyurethane film, which is preferably micro-cellular, is adapted in an advantageous manner between 500 and 1200 kg/m<sup>3</sup> by adjusting the amount of blowing agent, consisting of water and/or of low boiling solvents, and also the amount of air dispersed in the raw materials.

- 25 For some applications, it is important to realize a polyurethane layer substantially totally free of pores. This is realized according to the invention by degassing the isocyanate containing component and by degassing and dehydrating the active hydrogen containing component.


The hardness of the polyurethane film, formed on the mould surface, can be adjusted by the choice of the type and amount of the employed isocyanate, polyol, chain extender and/or cross-linker. Preference is given to a hardness between shore A 20 and shore D 80 depending on the applications/ requirements of the final PU films.

Finally, reinforcements such as glass fibre mats, can be inbedded in certain parts or in the complete, on the mould surface formed polyurethane film or layer. This can be done before or during the reaction mixture spraying.

- 35 Hereafter, a review is given of the abbreviations and codes used in this description and claims.

## 1. ISOCYANATES

- 40 I1 = IPDI = isophorone diisocyanate (Hüls Chemie)  
= 3-isocyanatomethyl-3,5,5-trimethylcyclohexyl-isocyanate (37.8 % by weight NCO)  
I2 = TMXDI = meta- or paratetramethyl xylene diisocyanate (Am.CYANAMID) (34.4 % by weight NCO).  
I3 = HDI = 1,6-hexamethylene diisocyanate (50 % by weight NCO)  
I4 = H6XDI = hydrogenated XDI (43 % by weight NCO) (TAKEDA CHEM. IND.).  
45 I5 = H12MDI hydrogenated MDI  
= DESMODUR W (MOBAY/BAYER)  
= dicyclohexylmethane diisocyanate (31.8 % by weight NCO)  
I<sub>x</sub>-I<sub>y</sub> = mixture of isocyanate trimers and isocyanate monomers based on an isocyanate I<sub>x</sub>(I<sub>1</sub>,I<sub>2</sub>...) having a terminal NCO content = y (percent by weight free NCO groups with respect to the total isocyanate mixture).  
50 I<sub>x</sub>-Py/z = mixture of isocyanate quasi-prepolymer (with free monomer) based on an isocyanate I<sub>x</sub>(I<sub>1</sub>,I<sub>2</sub>...) having a terminal NCO content = y %. The prepolymer being based on the polyol type Z(1,2,3,4)  
z = 1 : dipropylene glycol  
z = 2 : trimethylolpropane  
55 z = 3 : glycerin/propylene oxide addition product MW600  
z = 4 : polypropylene glycol MW 400 (molecular weight : MW)  
or on the polyamine type Z(5,6,7)  
z = 5 : a polyamine having the formula :




5

having a molecular weight of 2000

z = 6 : a polyamine having the formula :

10




15

wherein R is isohexyl and which has a molecular weight of 2000


z = 7 : a polyamine having the formula :

20



wherein R' is

25



30

and which has a molecular weight of 313

35

Ix-Ty = isocyanurate-trimer (with isocyanate monomer) mixture based on an isocyanate Ix(I1,I2...) having a terminal NCO content = y %.

## 2. Active hydrogen containing compounds :

40

P1 = addition product of glycerin, propylene oxide and ethylene oxide, having a hydroxyl number of 35, 80 % primary OH groups, a molecular weight of 4800 and an equivalent weight of 1600.

P2 = addition product of glycerin, propylene oxide and ethylene oxide, having a hydroxyl number of 28, a primary OH group content of 85 %, a molecular weight of 6000 and an equivalent weight of 2000.

45

P3 = addition product of diethylene glycol with propylene oxide and ethylene oxide, having a hydroxyl number of 28, a primary OH groups content of 90 %, a molecular weight of 4000 and an equivalent weight of 2000.

P4 = addition product of pentaerythrol with propylene oxide and ethylene oxide, having a hydroxyl number of 28, a primary OH groups content of 80 %, a molecular weight of 8000 and an equivalent weight of 2000.

50

P5 = polytetramethylene oxide glycol (PTMG) having a hydroxyl number of 56, a primary OH groups content of 100 %, a molecular weight of 3000 and an equivalent weight of 1500.

P6 = an addition product of sorbitol with propylene oxide and ethylene oxide, having a hydroxyl number of 400, a primary OH groups content of 55 %, a molecular weight of 840 and an equivalent weight of 140.

55

P7 = addition product of glycerin and propylene oxide and terminal NH<sub>2</sub> groups, having a molecular weight of 5000 (Jeffamine T5000-TEXACO).

P8 = polycaprolacton ester having a hydroxyl number of 56, a molecular weight of 2000 and an equivalent weight of 1000.

P9 = polycondensate ester between diethylene glycol and adipic acid, having a hydroxyl number of 56, a molecular weight of 2000 and an equivalent weight of 1000.

P10 = DURACARB 124 (PPG Industries Inc.-USA) = polycarbonate diol having an  $I_{OH}$  number of 60.

### 3. Chain extenders, cross-linkers and amine initiators

MEG = monoethylene glycol

DEG = diethylene glycol

BD = 1,4-butanediol

10 TMP = trimethylolpropane (or possibly a liquid addition product of TMP with 1 mole ethylene oxide)

TEOA = triethanolamine

DEOA = diethanolamine

MEOA = monoethanolamine

15 CD400 = Jeffamine CD400 (TEXACO) = addition product of a diol initiator, with propylene oxide and terminal secondary NH groups, having a molecular weight of 400 and an equivalent weight of 200.

EDA = ethylenediamine


Quadrol = addition product of ethylenediamine and 4 moles PO

IPDA = isophorondiamine

AEPD = 2-amino-2-ethyl-1,3-propanediol

20 AMP = 2-amino-2-methyl-1-propanol

a2 = a polyamine having the formula :



wherein R is isohexyl and which has a molecular weight of 200 (equivalent weight = 100)

30 b4 = a polyamine having the formula :



35 wherein R' is



45

and which has a molecular weight of 256 (equivalent weight = 128).

### 50 4. Catalysts (except for amine initiators)

#### a) Organolead catalysts (LC)

55 LC1 = lead-2-ethylhexoate

LC2 = lead-naphthenate

#### b) Organobismuth catalysts (BC)

BC1 = bismuth-(III)-2-ethylhexoate  
BC2 = bismuth-(III)-naphthenate

c) Organotin catalysts (TC)

TC1 = dimethyltindineodecanoate  
TC2 = dibutyltindiacetate  
TC3 = tetrabutyltindistanoxane dilaurate  
TC4 = dibutyltin dichloride

d) Alkaline catalysts (AC)

AC1 = 1,8-diazabicyclo (5,4,0) undecene-7-phenolate  
AC2 = idem AC1, but octoate salt  
AC3 = potassium octoate  
AC4 = sodium phenolate

e) Zeolite type catalysts (ZC)

ZC1 = sodium aluminium silicate - 3 Angström (powder)  
ZC2 = potassium aluminium silicate - 4 Angström (50 % powder, spread as a paste in ricinus oil)

5. Various additives

a) Antioxidizers/UV absorbers (AO/UV)

A mixture of antioxidant and UV absorbers consisting in percent by weight of :

- 40 % trisphenylphosphite
- 20 % 2-(2-hydroxy-3,5-di tert.amyl-phenyl)-2H-benzotriazole
- 20 % pentaerythrityl-tetrakis [3-(3,5-di tert.butyl-4-hydroxyphenol)propionate]
- 20 % di-sebacate ester of 4-hydroxy-2,2,6,6-tetramethylpiperidine

b) Tixotropic agents

A200 = Aerosil 200 (DEGUSSA - Germany) Coagulated, fumed silicon dioxide having an active surface of 200 m<sup>2</sup>/gr and a grain size of about 12 μ.

c) Colour pigment (concentrated dispersion in a P1 type active hydrogen containing compound).

A mixture(in the proportions 1:1:1) of :

- titanium dioxide (white)
- copper phthalocyanine (blue)
- di-azo condensate (red)

The concentrations given in the formulations relate to the solid pigments.

d) Internal release agent (IRA)

This release agent is based on a silicon, more in particular of the type polydimethylsiloxane-polyether copolymer having 90 % by weight siloxane and 10 % by weight polyether groups, the polyether chain containing 20 % ethylene oxide and 80 % propylene oxide units and the terminal groups being OH groups.

6) Kinetic process parameters

a) FT : fibre forming time "fibre time" (expressed in seconds), indicates the beginning of the gelling,

i.e. the moment on which a fibre can be drawn of the reaction mixture for example by means of a glass rod. This constitutes a measure for the pot-life.

b) TFT : "tac free time" (expressed in seconds) is the time at which the surface skin becomes substantially dry, i.e. not any more sticky.

5 c) DT : "demoulding time" (expressed in seconds) indicates the time at which the obtained film can be removed from the mould surface without problems, i.e. without sticking, deformation, etc..

d) run off : is a measure for the tendency of the reaction mixture, sprayed on the mould surface, to run off (at a too low viscosity build up) from a higher mould surface level to a lower level.

The visual codes thereof are as follows :

10 Code 0 : no "run off" (= ideal situation)

Code 1 tendency to run off (still satisfying)

Code 2 a slight run off (acceptable limit)

Code 3 and higher : more definite run off (not acceptable) resulting in too large thickness variations of the sprayed film.

15

#### 7. Properties of the sprayed films :

D : apparent density (gr/cm<sup>3</sup>)

20 ER : elongation at rupture (%) - ASTM D412

RR : tensile strength at rupture (MPa) - ASTM D412

TR : tear resistance in N/cm - ASTM D624

Shore A (D) : surface hardness - ASTM D2240

25 WOM : weatherometer test (accelerated light/heat aging test) under the following test conditions (ATLAS ES25 apparatus)

- xenon radiation source

- black panel temperature 88 °C

- cycle : 3.8 hours light/1 hour dark (no direct water spray on samples)

- test duration : 1000 hours.

30 In each of the examined cases, substantially no discoloration ( $\Delta E < 1.5$ ) or gloss variation (gloss retention > 70 % with respect to the original gloss degree before the WOM test) has been determined.

Internal codes relating to the visual degradation of the examined polyurethane film surface (cracks, brittleness) :

code 0 : completely satisfying

35 code 1 : tendency to cracks in surface (only microscopically visible)

code 2 : small cracks in surface

code 3 and higher : moderate to strong cracks (not acceptable).

The mention "OK" for the visual appearance indicates that no visual defects concerning the micro porous skin structure, excessive gas bubbles, colour streak formation or gloss differences in the surface of the sprayed film, have been observed.

40

The following Table 5 shows some specific examples of specific embodiments of the method according to the invention.

In these tables, the hereabove defined abbreviations and codes are thus used.

Further, the technology processing conditions are in these examples the following ones :

45 - high pressure, two components spray unit (with spray pistol)

- raw materials temperature : 60 °C

- metal mould surface temperature : 60 °C

- total output of components : 20 gr/sec

- sprayed film thickness : about 2 mm

50

55



Table 5 (A)

5	Example n°	1	2	3	4	5
10	act. H compound (basic polyol)	P1 : 100	P2 : 100	P3 : 100	P7 : 100	P9 : 100
	isocyanate	II - P28/1	II - T30	II - T27	II - P26/4	II - P27/3
15	NCO index	105	95	100	95	90
20	catalyst system (excluded amine initiators)	LC1 : 0,5 AC4 : 0,8	LC2 : 0,4 AC1 : 1 IC3 : 0,5	BC1 : 0,5 ZC1 : 1	LC1 : 0,4	BC2 : 0,5 IC1 : 0,5
25	chain ext./crosslinker (+ amine initiators)	DEG : 8 AMP : 5	MEG : 5 CD400 : 6	TBP : 3 quadrol : 2 DEOA : 4	MEG : 7 AEPD : 2	BD : 6 IPDA : 6
30	various					
	AO/UV	2				
	water	0,05	0,05	0,08	0,06	0,07
	tixotropic add	2	1,5	1,5	1	1
	color pigment	5				
	IRA	2				
35	PROCESS PA					
	FT (sec)	8	6	12	7	10
	TFT (sec)	30	25	55	30	35
	DT (sec)	120	90	150	60	120
	run off (code)	1	0/1	1	0	0/1
40	visual	OK				
	Properties PU					
	D	0,92	0,95	0,88	0,90	0,94
	ER	205	180	215	200	250
	RR	4	6	8	7	9
45	TR	290	350	330	370	410
	Shore A(D)	64A	52A	57A	54A	70A
	WOM test	0/1	1	1/2	0/1	1
	1000 h(ccc)					

Table 5 (B)

Example n°.	6	7	8	9	10
act. H compound (basic pol.)	PI : 100	P4 : 100	P8 : 100	P5 : 100	P1 : 100
isocyanate	II-T27	I2 - P26/2	I3 - 830	I3 - T30	I4 - P32/3
NCO index	100	100			
catalyst system (excluded amine initiators)	LC1:0,3 AC1 : 0,3 TC1 : 1	LC1 : 0,4 AC1 : 1,3 TC1 : 0,3	BC1 : 1	LC1 : 0,3 ZC2 : 0,9	BC1 : 0,3 TC4 : 0,3
chain ext./crosslinker (+ amine initiators)	MEG:3 b4 : 12	MEG : 4 TMP : 4 DEOA : 6	DEG : 5 TEOA : 2 AMP : 6	DEG : 5 TEOA : 2 AMP : 6	BD : 8 DEOA : 8
<u>various</u>					
AO/UV	2	4	3	3	2
water	0,05	0,09	0,05	0,03	0,04
tixo tropic addi.	1,5	1,5	1,8	1,6	1,4
color pigment	5	5			
IRA	2	2			
<u>PROCESS PA.</u>					
FT (sec)	8	10	9	9	8
TFT (sec)	35	40	35	30	35
DT (sec)	150	90	120	90	120
run off (code)	0/1	0/1	0/1	0/1	0/1
visual	OK	OK			
<u>Properties PU</u>					
D	0,90	0,83	0,91	1,05	0,96
ER	330	210	170	180	190
RR	9	7	4	4	5
TR	390	400	240	250	310
Shore A(D)	71A	61A	70A	63A	65A
WOM test	1	1	1	1	0/1
1000 h (code)					

Table 5 (C)

Example n°	11	12	13	14	15
act. H- com- pound (basic polyol	PI : 100	PI : 100	P7 : 100	PI : 100	PI0 : 100
isocyanate	I5 -P22/4	I1-P2615	I2-P26/6	I3-P30/5	I3-P35/7
NCO index	100	100	100	100	100
catalyst system (exclu- ded amine ini- tiators)	LC2 : 0,5 AC3 : 1,5	LC1 : 0,3 AC1 : 0,5 TC3 : 0,3	LC1 : 0,3 AC1 : 0,2	TC1 : 0,5	TC2 : 0,5
chain ext./ crosslinker (+ amine ini- tiators)	BD: 10 , AEPD : 5	MEG : 8 DEOA: 4	TMP : 10 DEOA : 5	BD : 12 02 : 4	BD : 8 b4 : 8
various AO/UV water tixotropic add. color pigment IRA	2 0,04 1,2 5 2	3 0,05 1,5 5 2	3 0,03 1,0 5 2	3 0,03 1,5 5 2	3 0,04 1,5 5 2
<u>PROCESS PA.</u> FT (sec) TFT (sec) DT (sec) run off (code) visual	12 35 120 1	11 35 100 0/1	9 35 90 0	10 35 100 0/1	10 35 100 0/1
<u>Properties PU</u> D ER RR TR Shore A(D) WOM test 1000 h (code)	0,95 250 6 370 58 A 1	0,88 240 7 340 61 A 1	0,92 260 8 350 60 A 1	0,90 270 7 390 70 A 1	0,86 300 7 420 75 A 1

Table 5 (D)

Example N°	16	17	18	19	20
act. H com- pound (basic pol.)	PI : 100	P7 : 100	PI : 100	PI : 100	P6 : 100
isocyanate	II - T28	II - P28/1	II - P26/2	II - T30	II - T30
NCO index	105	105	110	105	105
catalyst system (exclu- ded amine ini- tiators)	TC1 : 2 AC1 : 0,5	TC3 : 1 ZC2 : 0,5	LK1 : 0,5 TC1 : 1	TC2 : 1,0 AC2 : 0,5	TC2 : 1,2 AC3 : 0,7
chain exten./ crosslinker (+ amine ini- tiators)	MEG : 10 AEFD : 8	BD : 25 CD400 : 6	TMP : 15 DECA : 6	TMP : 60 quadrol : 20 EPDA : 4	MEG : 6 TECA : 3 DECA : 4
various					
AO/UV	2				
water	0,04	0,02	0,10	0,30	0,25
tixo tropic add.	1,0	0,9	0,9	0,9	0,9
color pigment	5				
IRA	3				
	0	0	0	4	0
PROCESS PAR.					
FT (sec)	10	8	8	6	8
TFT (sec)	35	25	30	25	30
DT (sec)	90	60	75	60	75
run off (code) - visual	1 OK	0	0/1	0	0/1
Properties PU					
D	0,91	1,02	0,85	0,60	0,77
ER	185	240	210	10	12
RR	12	15	14	23	31
TR	410	530	605	NA	NA
Shore A(D)	80A	82A	45D	78D	80D
WOM test 1000h (code)	0/1	0/1	1	0/1	0

From the examples 21 to 25 following hereinafter in Table 6, it can be deducted that if one or more catalysts or initiators are deleted or if their concentration is strongly reduced, the reactivity is reduced too fast thereby arising a too critical run off of the reaction mixture and a too slow curing of the sprayed film.

In the examples 21 to 25 of Table 6, the same formulations as in example 1 are repeated, however the catalysts and initiators amount being reduced as shown in the Table.

Table 6

Example n	concentration (pph)			FT (sec)	TFT (sec)	DT (sec)	RUN OFF (CODE)	VISUAL APPEARANCE
	LC1	AC4	AMP					
1	0,5	0,8	5	8	30	120	1	OK
21	0,5	0	5	30	120	360	1-2	OK
22	0,25	0,4	5	25	120	300	2	OK
23	0,25	0,4	2,5	35	180	420	3	OK limit
24	0	1,5	5	120	600	+/-1h	>> 3	unacceptable
25	0,5	0,8	0	180	600	+/-1h	>> 3	unacceptable

## Claims

1. A method for preparing a light stable polyurethane, sprayable by means of a spray pistol and having an initial viscosity of 200 to 1200 cps at application temperature, a fibre forming time ("FT") larger than 3 seconds, preferably larger than 4 seconds, and a demoulding time ("DT") less than 10 minutes, wherein an isocyanate, having at least two NCO groups which are not directly attached to an aromatic group, is made to react with a compound containing active hydrogen with respect to NCO groups, in the presence of a chain extender and/or a cross-linker and possibly a blowing agent, characterized in that use is made of an active hydrogen containing compound, wherein the functional groups consist for at least 50 % of an active CH<sub>2</sub>OH, NH and/or NH<sub>2</sub> group, the functionality of which varies from 2 to 8 and the equivalent weight of which is comprised between 100 and 3500, together with 2 to 300 parts, per 100 parts of said compound, of a chain extender and/or a cross-linker, the functional groups of which are OH groups, at least 50 % of which are primary OH groups, the equivalent weight of which is less than 100 and the functionality of which varies from 2 to 6, and with a catalytic system which comprises at least an organic lead, bismuth and/or tin (IV) compound and at least an amine initiator, having a functionality of 2 to 6, an equivalent weight lower than or equal to 200, and at least one aliphatic NH<sub>2</sub> or NH group.

2. A method according to claim 1, characterized in that at the most 0.4 % of water and at the most 0.04 moles of a physical blowing agent, having a boiling point of 20 to 70 °C, is added with respect to 100 grams of said active hydrogen containing compound, cross-linker, chain extender and initiator.

3. A method according to anyone of claims 1 or 2, characterized in that an isocyanate is used consisting mainly of IPDI monomer and/or a mixture of IPDI monomer and IPDI derivatives, such as trimers, especially isocyanurate or biuret trimers, prepolymers and/or carbodiimide/urethidion derivatives, in such ratio's which allow to obtain a NCO value of 15 to 37.8 in percent by weight.

4. A method according to anyone of claims 1 to 3, characterized in that an isocyanate is used consisting mainly of TMXDI monomer, (with meta and/or para isomer), prepolymers, biuret trimer and/or carbodiimide/urethidion derivatives, in such ratio's which allow to obtain a NCO value of 15 to 34.4 in percent by weight.

5. A method according to anyone of claims 1 to 4, characterized in that use is made of an isocyanate consisting mainly of HDI monomer possibly with HDI derivatives, such as trimers, especially isocyanurate or biuret trimers, prepolymers and/or carbodiimide/urethidion derivatives, in such ratio's which allow to obtain a NCO value of 15 to 50 in percent by weight.

6. A method according to anyone of claims 1 to 5, characterized in that an isocyanate is used consisting mainly of H6XDI monomer possibly with H6XDI derivatives, such as trimers, especially isocyanurate or biuret trimers, prepolymers and/or carbodiimide/urethidion derivatives, in such ratio's to obtain a NCO value of 15 to 43 in percent by weight.

7. A method according to anyone of claims 1 to 6, characterized in that an isocyanate is used consisting mainly of H12MDI monomer possibly with H12MDI derivatives, such as trimers, especially isocyanurate or biuret trimers, prepolymers and/or carbodiimide/urethidion derivatives, in such ratio's which allow to obtain a NCO value of 15 to 31.8 in percentage by weight.

8. A method according to anyone of claims 3 to 7, characterized in that prepolymers based on polyetherpolyols, chain extenders and/or cross-linkers having as functional groups only OH (primary and/or secondary) a functionality of 2 to 6 and a hydroxyl number of 15 to 1800, are used.

9. A method according to anyone of claims 1 to 8, characterized in that use is made of an active hydrogen containing compound, consisting mainly of polyether alcohols which are formed by the polyaddition of propylene oxide and/or ethylene oxide on low molecular initiators.

10. A method according to anyone of claims 1 to 9, characterized in that use is made of an active hydrogen containing compound which comprises polyester alcohols consisting of the ester condensation products of dicarboxylic acids with low molecular polyalcohols having a functionality of 2 to 4.

11. A method according to anyone of claims 1 to 10, characterized in that use is made of an active hydrogen containing compound consisting mainly of polycaprolactone esters with terminal primary OH groups.


12. A method according to anyone of claims 1 to 11, characterized in that use is made of an active hydrogen containing compound consisting mainly of polytetramethylene ether glycols (PTMG).

13. A method according to anyone of claims 1 to 12, characterized in that use is made of an active hydrogen containing compound consisting mainly of polyetherpolyols having a functionality of 2 to 3, a hydroxyl number of 15 to 200, and which are possibly modified with polymerized organic fillers, such as polyols grafted with styrene/acrylonitrile, PHD polyols and PIPA polyols, the filler content varying from 0 to 50 % by weight.


14. A method according to anyone of claims 1 to 13, characterized in that use is made of an active hydrogen containing compound consisting mainly of polyols having at least 70 % primary OH groups.

15. A method according to anyone of claims 1 to 14, characterized in that use is made of a chain extender and/or cross-linker consisting mainly of at least one of the following substances : ethylene glycol, propanediol, triethanolamine, butanediol, pentanediol, hexanediol, glycerin, trimethylpropane, trimethylolthane, pentaerythrol, bisphenol A, cyclohexanedimethanol, and ethylene oxide addition products of these substances with less than 5 moles ethylene oxide per mole of said substances.

16. A method according to anyone of claims 1 to 15, characterized in that use is made of a catalytic system consisting at least of two elements being said amine initiator and at least one of the following metal compounds : (a) organic lead and/or bismuth catalysts, especially salts of organic acids, such as octoate and naphthenate salts, or (b) Sn (IV) carboxylates having general formula (A) :

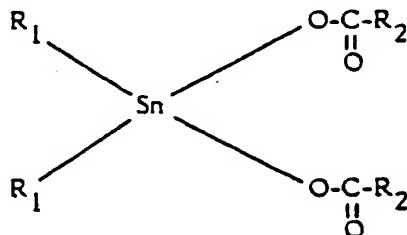

wherein  $R_1$  represents a methyl group and  $R_2$  forms a  $(C_1 - C_{12})$  alkyl radical or a naphthenic acid radical, the alkyl radicals being linear or branched, or (c) dialkyldistannoxane dicarboxylates having general formula (B) :

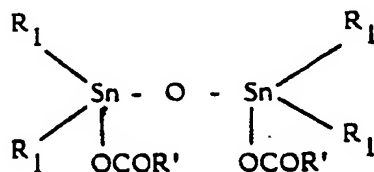

wherein  $R_1$  represents a  $(C_1 - C_4)$  alkyl radical and  $R'$  a  $(C_1 - C_{12})$  whether or not branched alkyl radical or (d) alkyltinhalides having general formula  $(R_1)_x Sn(Hal)_y$ , wherein  $R_1$  represents a  $(C_1 - C_4)$  alkyl radical and "(Hal)" a chlorine or bromine atom,  $x + y = 4$  and  $x$  or  $y$  varies from 1 to 3.

17. A method according to anyone of claims 1 to 16, characterized in that use is made of an amine

initiator comprising at least one of the following compounds : monoethanolamine, diethanolamine, diisopropanolamine, ethylenediamine, isophoronediamine, N,N'-dimethyl(diethyl)-ethylenediamine, 2-amino-2-methyl(or ethyl)-1-propanol, 2-amino-1-butanol,

3-amino-1,2-propanediol,

5 2-amino-2-methyl(ethyl)-1,3-propanediol

"Jeffamines" (Texaco) (propylene oxide addition products having mainly terminal primary NH<sub>2</sub> or secondary NH groups - functionality 2 à 3 - equivalent weight < 200).

18. A method according to anyone of claims 1 to 17, characterized that use is made of a catalytic system comprising at least an amine initiator together with an organic lead, tin or bismuth compound and

10 (a) a zeolite type catalyst formed of an alkaline aluminium silicate with sodium and/or potassium ions, and/or (b) an alkaline catalyst having a pH higher than 10 and consisting of diazobicyclo-alkenes or salts of the latter with weak organic acids or consisting of potassium, sodium or lithium salts of weak organic acids.

19. A method according to anyone of claims 1 to 18, characterized in that an internal release agent is added to the reaction mixture, consisting preferably of a polydimethylsiloxane-polyether copolymer having  
15 less than 20 % by weight of polyether with respect to the total molecule and less than 50 % by weight ethylene oxide with respect to the sum of ethylene oxide and propylene oxide in the polyether chain, the concentration of this release agent varying between 0 and 5 % by weight with respect to the total polyurethane polymer amount.

20. A method according to anyone of claims 1 to 19, characterized in that use is made of a tixotropic thickening agent consisting preferably of fumed coagulated silicon dioxide at a concentration between 0 and 3 % by weight with respect to the total polyurethane amount.

21. A method for spraying the light stable polyurethane prepared according to anyone of the previous claims, characterized in that use is made of a two components system, wherein one component comprises the isocyanate and all of the additives which are with respect to this isocyanate during a sufficient time  
25 period stable and compatible with the latter and wherein the other component comprises the compounds containing active hydrogen with respect to NCO groups, especially polyols, chain extenders and cross-linkers, and additives which are with respect to these compounds during a sufficient time period stable and compatible with the latters.

22. A method according to claim 21, characterized in that the components are preheated up to a  
30 temperature not higher than 120 °C and preferably between 30 and 70 °C, before the spraying.

23. A method according to anyone of claims 21 or 22, characterized in that the temperature of the polyurethane reaction mixture is adjusted at the spraying in such a manner that the viscosity of the latter is not higher than 1200 cps and preferably not higher than 700 cps.

24. A method according to anyone of claims 21 to 23, characterized in that the surface, the  
35 polyurethane is sprayed on, is kept on a temperature of 30 ° to 100 °C and preferably of 50 to 80 °C.

25. A method according to anyone of claims 21 to 24, characterized in that the density of the sprayed polyurethane layer is adjusted between 500 and 1200 kg/cm<sup>3</sup> by adapting the amount of blowing agent and dispersed air in the raw materials.

26. A method according to anyone of claims 21 to 25, characterized in that a polyurethane layer,  
40 substantially free of pores and having a density of 900 to 1200 kg/cm<sup>3</sup> is formed by degassing and dehydrating before the spraying, at least the component comprising the active hydrogen containing compound.

27. A method according to anyone of claims 21 to 26, characterized in that the hardness of the sprayed polyurethane layer is adjusted between shore A 20 and shore D 80 by selecting the type and the amount of  
45 the isocyanate, the active hydrogen containing compound, the chain extender and/or the cross-linker.

50

55